


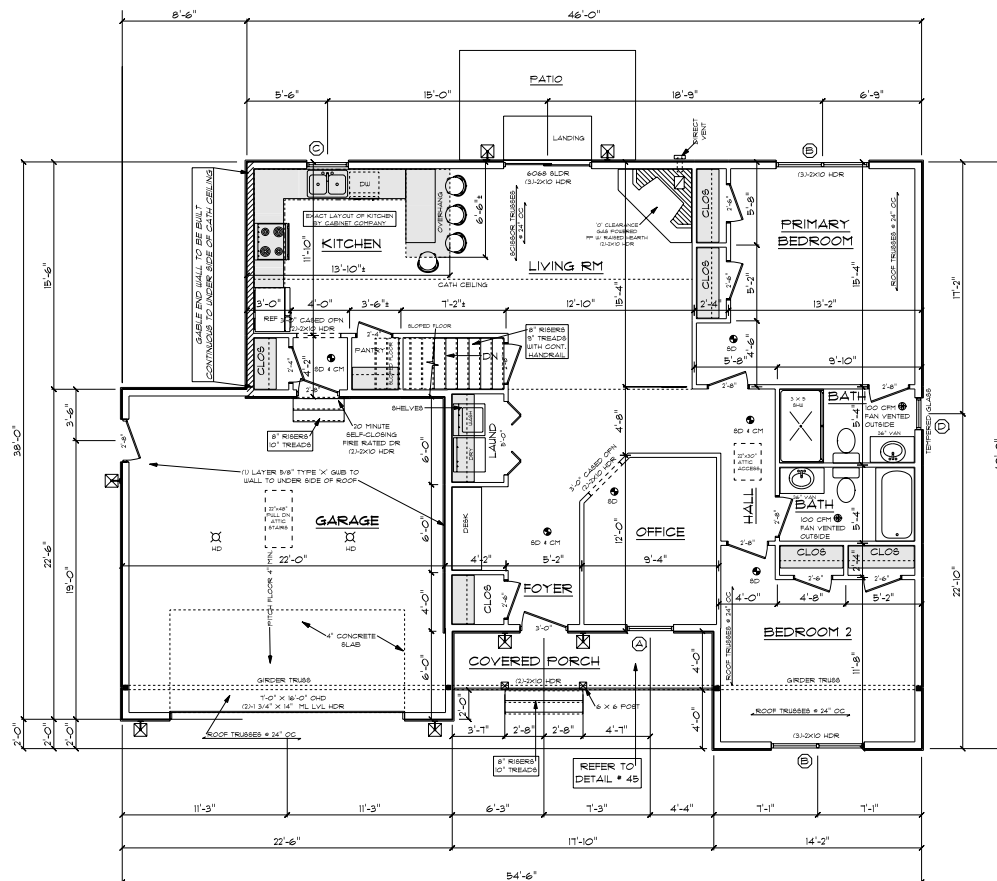

2X6 STUDS @ 16" OC
AT ALL EXTERIOR WALLS
UNLESS OTHERWISE NOTED

FLOOR PLAN 1/4"=1'-0"

• POINT LOAD FROM ABOVE
PROVIDE THE FOLLOWING:
(1) SOLID BLOCKING BETWEEN BEAM
(OR SILL) AND PLYWOOD SUBFLOOR
(2) MINIMUM 6" X 6" POST